

Intellex[®] Version 1.6 Upgrade

Since we continually improve our products, we have prepared this upgrade package for you. Use it to upgrade your Intellex unit software to version 1.6.

New Features In addition to performance improvements, this upgrade adds the following features:

- The unit diagnoses archive problems more effectively than previous versions. It also provides more information about archive operations. New archive options let you format tapes and recover data from tapes.
- A computer with the Network Client software can access the unit's status, alarm list and image database over a local area network (LAN). The proper network hardware must be installed in the unit and configured correctly. You may also have to upgrade the unit's motherboard. (Contact technical support for more information.)
- The unit supports watchdog operation when the appropriate hardware is installed. (Contact technical support for more information.)

Refer to the Intellex online help and manuals, especially the *Intellex Version 1.6 Addendum*, for more information. You can also refer to the Network Client online help and manuals.


Installation Instructions **CAUTION: Do NOT modify any BIOS or system settings. Do NOT reconfigure any hard drives. Do NOT install any other software, including screen savers, or you will affect unit operation.**

NOTE: Exiting to the system is a protected feature. You must possess the **Exit to System** privilege to access it (see *Security Setup* in the *Intellex Installation Instructions*).


To install the Intellex software v1.6 upgrade:

1. From the main screen, click the **Utility** button. The **Utility Options** screen appears (see *Utility Options* in the *Intellex Operating Instructions*).

2. Verify the currently installed Intellex software version and processor information.
 - a. Click **About Intellex**. The About Intellex screen appears. Write down the version number.
 - b. Click **System**. Write down the processor information, e.g., AMD - 300 MHz. For Network Client operation, the processor must be rated at 300 MHz or more. (Contact technical support for more information.)
 - c. Click **OK** to close the system information screen.
 - d. Click **OK** again to return to the Utility Options screen.
 3. Click **Exit**. A confirmation screen appears.
 4. Select one of the following options:
 - No** — Click to cancel the exit process and return to the Utility Options screen.
 - Yes** — Click to exit Intellex and go to Windows 95.
- NOTE: If the Intellex software installed on your unit is version 1.31 or earlier, skip to step 6.
5. The Enter PIN Code screen appears.

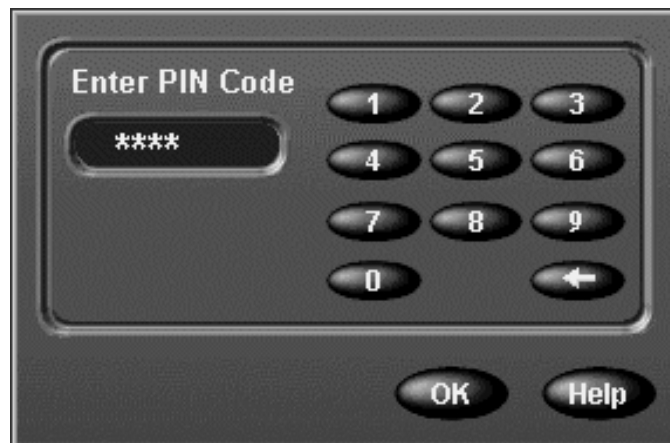

Enter the system exit code. (Contact your dealer or Sensormatic for this code.) The unit displays asterisks as a security measure.

- a. Use the mouse pointer to click the numeric buttons to enter the code.
- b. Click  (backspace) to erase an entry.
- c. Click **OK** to exit Intellex and go to the Windows 95 operating system.

The system verifies the code. If you entered an incorrect PIN code, the system returns to normal operation. If you entered the correct PIN code, the system exits Intellex and goes to Windows 95.

6. Access the Windows 95 Control Panel screen:
 - a. Move the mouse pointer to the bottom of the screen. The Windows 95 task bar appears.
 - b. Click the **Start** button. When the **Start** menu appears, move the mouse pointer to **Settings**. The **Settings** menu appears.
 - c. Move the mouse pointer to **Control Panel** and click. The Control Panel screen appears.
7. Double-click the **Add/Remove Programs** icon. The Add/Remove Program Properties screen appears.
8. Click the **Install** button. The Install Program From Floppy Disk or CD-ROM screen appears.
9. Insert the first diskette, labeled **Intellex® Software Package Disk 1**. Then click **Next**.
10. When the Run Installation Program screen appears, click **Finish** to start the installation.
11. When the Installer Information screen appears, enter the **Name**, **Company** and **Telephone** for the installer. You must fill each field to continue. Then click **Next**.

12. When the **Setup Needs The Next Disk** screen appears, insert the second diskette, labeled **Intellex® Software Package Disk 2**. Then click **OK**.
13. Repeat step 12 for the remaining diskettes.
14. When the **DirectX Setup** screen appears, click **OK**.
15. When the **Setup Complete** screen appears, remove the last diskette. Then click **Finish** to restart the unit.
16. When the main Intellex screen appears, verify the upgrade:
 - a. From the main screen, click the **Utility** button. The **Utility Options** screen appears.
 - b. Click **About Intellex**. If Version 1.6 does not appear on the **About Intellex** screen, contact your dealer or Sensormatic.
 - c. Click **OK** to return to the **Utility Options** screen.
 - d. Click **Close** to return to the main screen.

The upgrade installation is complete.

NOTES